


Luxafor Bluetooth PRO

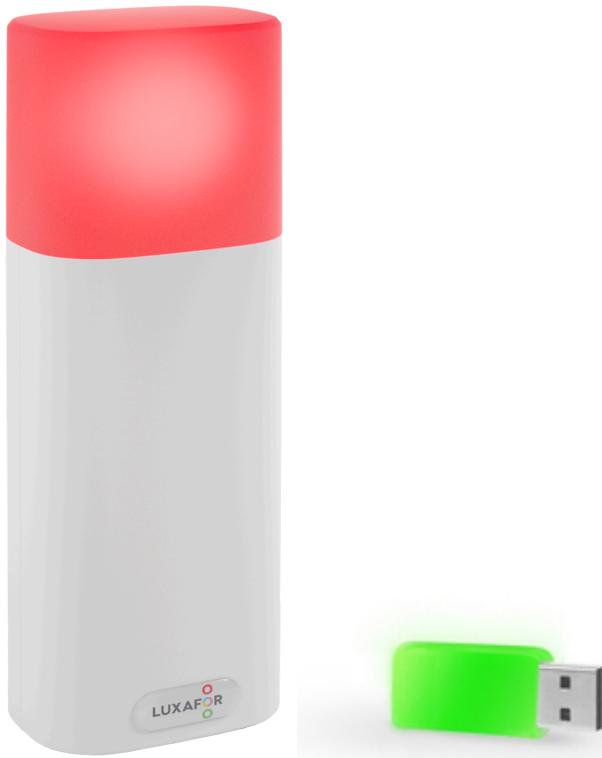

User Manual

Luxafor Bluetooth PRO Package Contents

1x Luxafor Bluetooth Pro

1x Luxafor Dongle

1x Micro USB-C Charging Cable

1x Magnet with double-sided tape



Product Specifications

Luxafor Bluetooth PRO with built-in battery

Dimensions: 98 x 38 x 24 mm

(3.85 x 1.45 x 0.86")

Weight: 75g

Light: 2 x RGB LEDs

Consumption: Rated power up to 80 mA

Charging: With a standard Micro USB-C data cable (included)

Built-in A grade 2600 mAh battery that can be turned on/off with a button

Working time: 80h - 9 months depending on brightness and working mode

Bluetooth 5.2 Radio with supported LE coded PHY

Luxafor Dongle

Dimensions: 42 x 18 x 8 mm

(1.65 x 0.70 x 0.31")

Weight: 8g

Light: 2 x RGB LEDs

Consumption: Rated power up to 80 mA

USB powered

Bluetooth range: Up to 80 meters (~260 feet) without obstacles

Charging Instructions

1. Prior to use, charge the device by connecting the included charging cable to a USB power outlet² such as a USB charger, and plug the other end into the device's Type-C charging port. Charging time approx. 3 - 5h.
2. The LED indicator on the device will glow red showing that the unit is being charged. When charging is complete, the LED indicator will go solid green.

Getting Started

You can choose to control your Luxafor Bluetooth PRO from a computer or with a mobile device.

Connecting Luxafor Bluetooth PRO to a Computer

1. Download and install Luxafor desktop software for your OS from <https://luxaformanual.com/>.³
2. Remove the plastic from the double-sided tape that is on the magnet and attach the magnet to a smooth and clean surface on which you would like to place the Luxafor Bluetooth PRO.
3. Launch Luxafor software on your computer.
4. Plug the Dongle into the computer from which you will be controlling your Luxafor device.
5. Wait for the devices to connect⁵ & enjoy!

Connecting Luxafor Bluetooth PRO to a mobile device

1. Download the app to your device from [Google Play](#) or [App store](#)
2. Turn on Bluetooth on your mobile device.
3. Open the app and press “Connect”.
4. Choose the closest “Luxafor Bluetooth PRO” from the list.
5. Wait for the devices to connect.
6. Enjoy!

Luxafor Built-In Battery Duration

The battery duration for Luxafor Built-in Battery varies depending on multiple variables, including the colors used, the brightness of LEDs, and if used continuously or infrequently.

The Luxafor Bluetooth PRO device working time on continuous use:

- Up to a year in the stand-by regime;
- 1756h: Patterns only;
- 702 h: Basic colors (Red, Green, Blue) on lowest brightness;
- 604 h: Mixed colors (Yellow, Cyan, Magenta, etc) on lowest brightness;
- 123 h: Basic colors (Red, Green, Blue) on maximum brightness;
- 67 h: Mixed colors (Yellow, Cyan, Magenta, etc) on maximum brightness.

When not in use, turn off the device to ensure the longest battery duration on one charge.


How To Use Luxafor Desktop Software



In the General section of the Luxafor software, you can choose in which mode you want to use Luxafor. Each mode takes control of your Luxafor, so only one tab (mode) can be active at a time.

The Luxafor Bluetooth PRO device can be paired with Luxafor Switch.

Solid Color mode

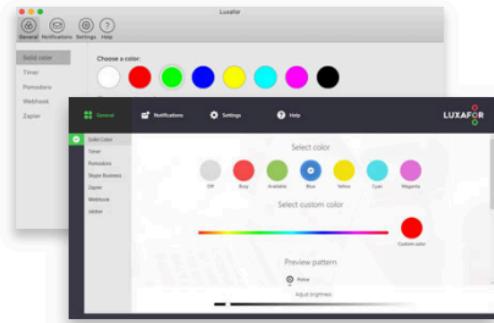


Choose from pre-set colors like Red for Busy and Green for Available or define other color meanings with Custom Color by using the slider to choose from 16M available colors.

Available on:  


Timer mode

With the Timer, you can plan and schedule your tasks throughout the day. Set the times when you can't be disturbed and when you're available.

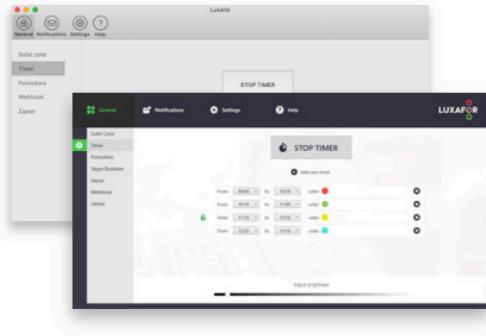

Just press “Add new timer”, input the times, and choose a color and Luxafor Bluetooth PRO will change the lights accordingly.

Available on:  

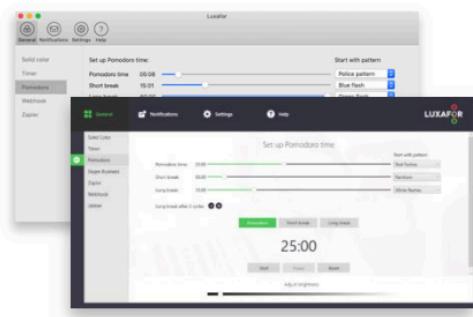


Available on:  

Change Pomodoro time and length of breaks to fit your work pace. Luxafor notifies you of the beginning of a session with a blinking pattern of your choosing.

Luxafor will automatically turn red when you are on your Pomodoro session and do not wish to be disturbed. It will turn green when you are on your break.

It is possible to Start, Pause or Reset your Pomodoro sessions.

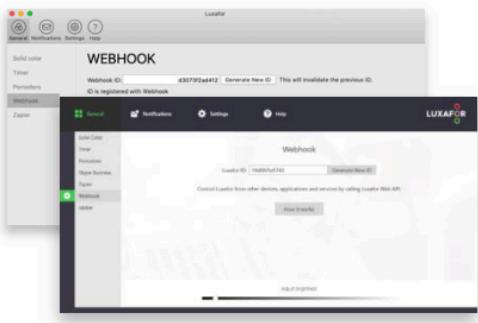


Webhook mode

Study, alter, and develop new solutions, integrations, and services!

Control other devices and create more features by calling Luxafor Web API! (More information here: <https://luxafor.com/webhook-api/>)

Available on:  

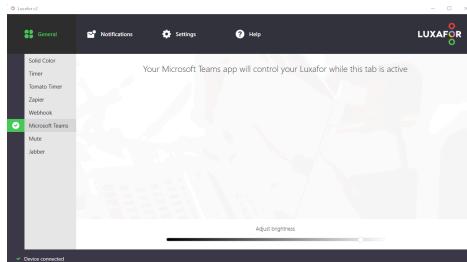

Microsoft Teams mode

In Teams mode, Luxafor indicates your availability status on the device according to Teams status.


Follow these instructions to connect Luxafor with Microsoft Teams:

<https://luxafor.com/microsoft-teams-teams-only-mode/>

Available on:  

Zapier mode

You can choose from 3 types of actions: Play Pattern, Solid Color, or Blink Color, and choose from a variety of

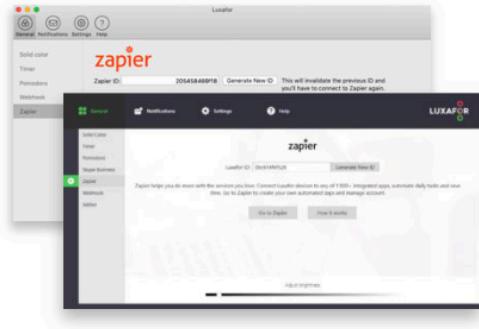


colors or modes for each action.

Copy your unique Luxafor ID from this tab when creating a zap on Zapier, test the connection there and enjoy your new workflow!

Get early access here: <https://zapier.com/apps/luxafor/>

Read more detailed instructions on Zapier integration here: <https://luxafor.com/zapier/>

Available on:  

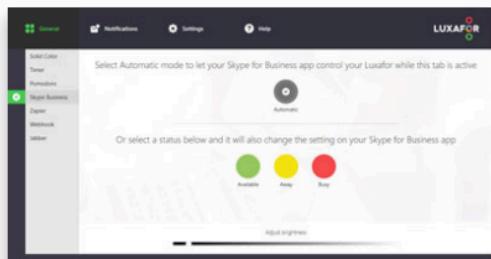

Cisco Jabber mode

Reduce delays in communication - allow Luxafor Bluetooth PRO to change color according to Jabber presence status and blink red during a call!


Follow these instructions to connect Luxafor with Cisco Jabber:

<https://luxafor.com/luxafor-cisco-jabber-presence/>

Available on: 



Set Luxafor Bluetooth PRO to blink when there is an unread email in your inbox or blink only on the arrival of a new email. You can even set up notifications for emails containing specific keywords.

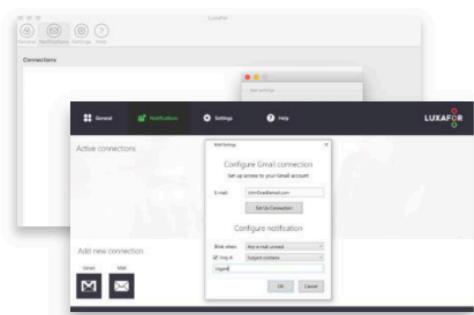

To connect your email choose “Gmail” if you have a Gmail account or “Mail” for any other email. To set up a connection, fill out the required fields in the pop-up.


You can set notifications to blink when there is an unread email in your inbox or to blink only on the arrival of a new email.

You can even set up notifications for emails containing specific keywords. For example, receive notifications only when you receive an email containing the word “order” to keep up to date with your sales.

A Hotkeys

You can define Hotkeys in the “Settings” section of Luxafor Software.

Save more time with Hotkeys - switch colors even faster without opening the application. This way you can control the Luxafor Bluetooth PRO color without taking your mind off of tasks.

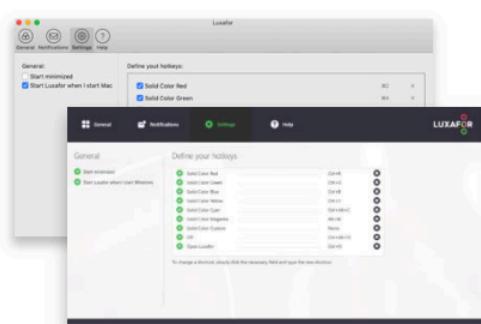

Simply type in the shortcut you wish to use and the light will change according to your defined preferences!

Available on:  

Apple iPhone Shortcuts integration

1. Install the Luxafor App for iPhone

Find it here: [LINK](#)

2. Connect Luxafor Bluetooth Pro to Your Phone

Open the Luxafor app on your iPhone.

Tap “Connect” to start searching for nearby Luxafor Bluetooth Pro indicators.

Select your Luxafor Bluetooth Pro from the list to pair with it.

3. Create a Shortcut to Change Luxafor Color

Open the [Shortcuts app](#) on your iPhone.

Tap “+” in the top right to create a new shortcut.

Tap “Add Action”, then search for “Luxafor”.

Select “Set solid color”.

Tap “Set Color”, then pick a color (e.g., Red for Busy).

Give the shortcut a name (e.g., “Busy”), and tap “Done”.

4. Add a homescreen widget to change color by triggering the shortcut from your homescreen

Open the shortcut you created and tap on the arrow next to the name of the shortcut

Choose an icon for the shortcut. For example, a red light bulb.

Again, tap on the arrow next to the name of the shortcut and tap “add to Home Screen”

You can repeat the steps to create multiple homescreen widgets, each for a unique color or for playing different blinking color patterns.

5. Explore custom triggers and create your own automations and shortcuts

Explore the Shortcuts app and use Luxafor Bluetooth Pro in your shortcuts. For example:

- Turn red when in a call
- Sync with “Focus Mode”
- Change colors with voice commands from Siri
- Double tap or triple tap the back of your iPhone to change colors (accessibility settings)
- Change colors when a meeting in your calendar starts
- Blink LED when a specific notification is received

Additional Remarks

¹ See “Luxafor Bluetooth PRO Battery Duration” on page 3 of this manual for detailed working hours variation.

² Do not use computer USB ports to charge Luxafor Bluetooth PRO device, as this can result in a much slower and less energy-efficient charging process. Also, if the device is used infrequently or hasn't been used for a long time, we recommend fully charging it every three months. This will prevent battery damage resulting from the over-discharge of the product.

³ You can use Luxafor Bluetooth PRO with any computer or mobile device that runs the following OS:

Windows: Windows 7; Windows 8; Windows 8.1; Windows 10, or Windows 11.

Mac: Mountain Lion; Mavericks; Yosemite; El Capitan; Sierra; Mojave; Catalina; Big Sur; Monterey; Ventura.

Android: Android 5.0 and more recent versions.

Iphone: iOS 12.0 or later

⁴ It can take up to 2 minutes for the devices to connect. When the devices are not connected, the Bluetooth PRO device will blink red every 2 seconds while waiting for connection and the Dongle unit will blink in the color you have set in the software every 5 seconds.

Troubleshooting Steps for Known Issues

- **“I plug the Dongle unit into my computer/hub, but nothing happens.”**
 1. Make sure you allow up to 2 minutes for the devices to connect⁴.
 2. Make sure you have installed the latest Luxafor software version. It’s v.2.1.5.26 for Windows and v.2.0.13 for Mac.
 3. Make sure you are using the Luxafor Dongle provided.
 4. Test if the USB port on your computer or hub is working correctly by plugging other devices, such as a keyboard or a memory stick, into the same port.
 5. Test other USB ports on your computer or hub by plugging in the Luxafor Dongle.
 6. Test other computers with the same operating system (and its version) by plugging in the Luxafor Dongle.
 7. Make sure the device is fully charged. Please refer to “Charging Instructions” on page 2 of this manual for more information.
 8. Check if there aren’t any obstacles, such as a thick concrete wall or dense metallic objects that could potentially block the signal.
 9. Make sure the tab of your choice is active on the software for it to work. For example, if you wish Luxafor to display your connection on Zapier, then the “Zapier” tab must be open on Luxafor software. Notifications and Settings (Hotkeys) can work simultaneously with the 6 modes of the General section.
- **“My Luxafor Bluetooth PRO does not work at startup after a cold start, what should I do?”**
 1. Make sure you have enabled “Start Luxafor when I start Windows” in the “Settings” tab of Luxafor Software for Windows or Mac.
 2. Make sure the device is fully charged. Please refer to “Charging Instructions” on

page 2 of this manual for more information.

3. Make sure that the USB ports are not in "hibernation mode." Please go to your Windows "Device Manager" and click the "+" sign next to "Universal Serial Bus Controllers." Click on any "Root Hub" and select "Properties." Click the Power Management tab and ensure that "Allow the computer to turn off this device to save power" is enabled and proceed to do this under each "Root Hub." Also, from the Control Panel and Power Options, select the Hibernation Tab and deselect "Enable hibernate support."

- "My Gmail notifications are not working properly on Windows."

or

- "There is a pop-up asking to log into my Gmail again. Is that safe?"

1. Make sure your IMAP is enabled. More information:

<https://support.google.com/mail/answer/7126229?hl=en>.

2. If you have set up a two-factor authorization, then you must generate App Password. This is the password you must use in the Luxafor configuration, not your Gmail account password. More information:

<https://support.google.com/accounts/answer/185833>.

3. Make sure the Notifications tab in Luxafor Software is active and click "Mail".

4. Fill the fields with the information as shown in the picture below and click "OK" or Test the Connection if you wish:

Mail Settings X

Configure e-mail connection

Enter IMAP server settings to set up connection

Username / e-mail:	<input type="text" value="sally@gmail.com"/>
Password:	<input type="password" value="*****"/>
Mail server:	<input type="text" value="imap.gmail.com"/>
Port:	<input type="text" value="993"/> <input checked="" type="checkbox"/> Use SSL

If you were unable to resolve the issues you are having with these troubleshooting steps, and you feel your product is still not working properly, [755544](tel:755544)

Configure notification

Blink when:	<input type="text" value="Any e-mail unread"/>
<input type="checkbox"/> Only if:	<input type="text" value="Subject contains"/>

please don't hesitate to contact us at support@luxafor.com or call +371 27755544.

Send us a full report of the issue, explaining the details of the situation, when the issue first occurred, and if the issue persists throughout the troubleshooting process. Don't forget to mention the OS you're using and pictures/ videos to better explain the situation.

The Company reserves the right to change these terms and conditions at any time without prior notice. In the event that any changes are made, the revised changes shall be posted on this website immediately. Please check the latest information posted herein to inform yourself of any changes.