

# Luxafor Smart Button




## User Manual

# Luxafor Smart Button Package Contents

1x Luxafor Smart Button

1x USB Data Cable  
0.5 m (20") or 1.5 m  
(60")

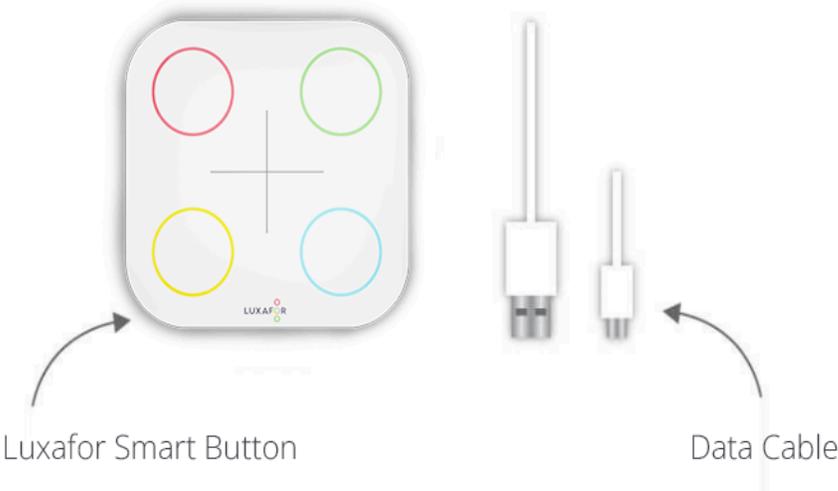

## Product Specifications

**Dimensions:** 56 x 56 x 12 mm

**Consumption:** Up to 100 mA

**Charging:** USB powered (With the standard micro USB data cable provided in the packaging)


**Weight:** 50g without cable

**Light:** 8 x RGB LEDs



# Getting Started

1. Download and install Luxafor Smart Button Software for your OS from [Software | Luxafor Manuals](#);
2. Launch Luxafor Smart Button Software on your device;
3. Place Luxafor Smart Button on an even surface where you intend to use it. Connect Luxafor Smart Button to your device which you'll need the extra functionality for using the USB cable included;
5. Bind your functionalities to 4 clicks, double clicks & hold options and light options;
6. Enjoy!

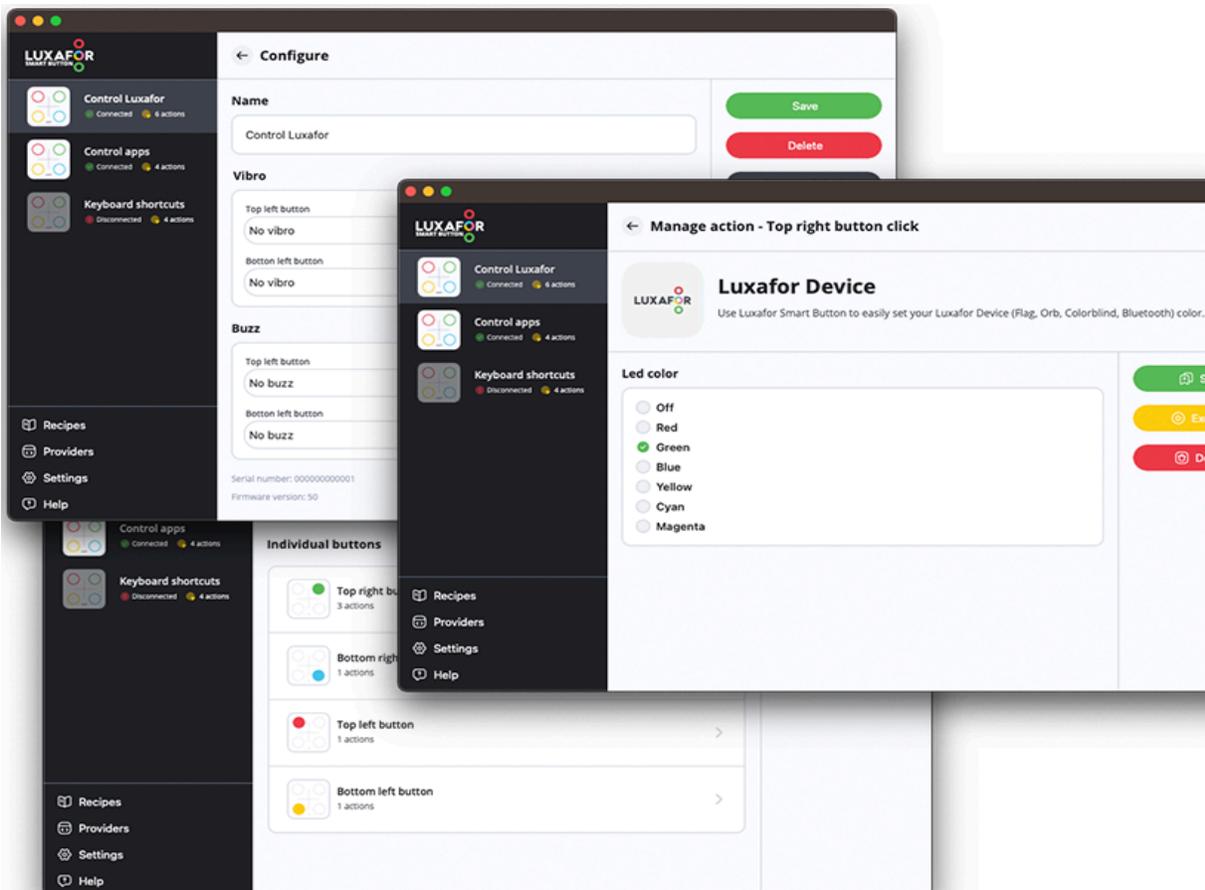

# How To Use Luxafor Smart Button Software

## General

Luxafor Smart Button lets you operate almost any internet-connected gadget with various button taps. Bind every function you need to any of 4 buttons and ways you use them (tap, double-tap and hold). Unbind and re-configure those buttons, so you have other opportunities for shortcuts. Configure individual buttons to buzz or vibration modes.

Create custom meanings for buttons – or change those, when you need to, so functionalities can differ and are unlimited.

Activate keyboard shortcut events, Webhook, and Luxafor gadgets: Luxafor Flag, Luxafor Bluetooth (PRO), Luxafor Orb and Luxafor Colorblind Flag, and other devices and apps that are compatible with Luxafor products.

# Settings

Settings for startup and window behavior:


- Activate/deactivate automatic software startup at OS startup;
- Activate/deactivate automatic software minimization on software launch.

The Luxafor Smart Button “Configure” section allows:

- To change the name the Luxafor Smart Button;
- To change the sound and vibration modes for each of the button sections - there are 3 modes to choose from;
- To change “hold” time and “double click” time for the responsiveness of the button surface.

Device settings: General settings to customize the LED light brightness of multiple Luxafor Smart Button devices.

Additional settings: Software language change available for Windows devices.

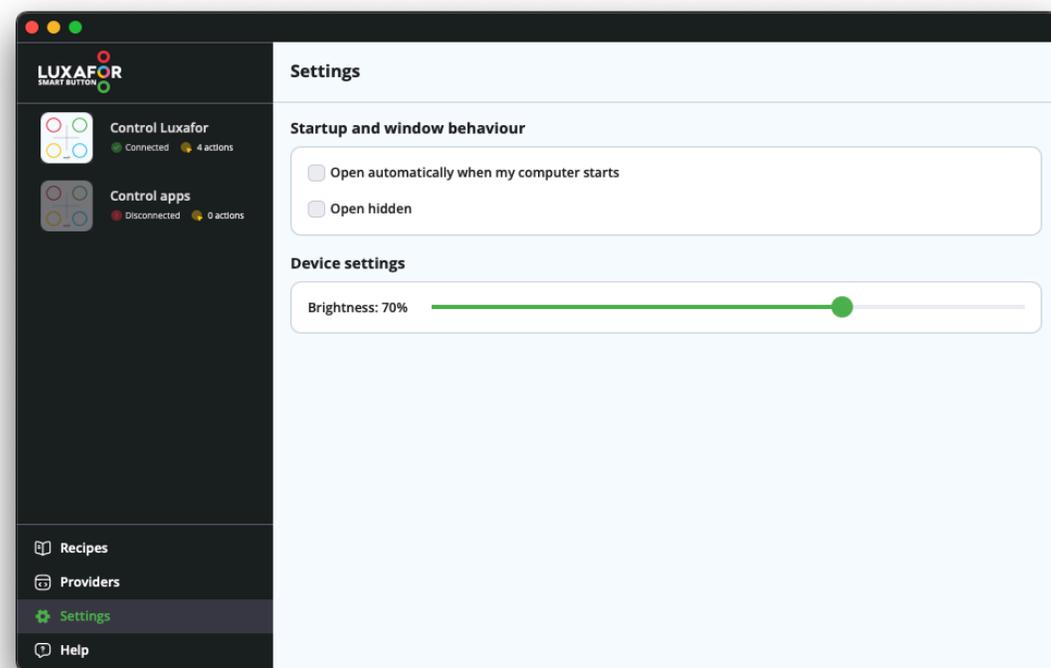


## Integration recipe for devices

### How to add an integration recipe to a device:

Activate the "Recipes" section in the main application navigation panel. A list of all available recipes appears. Then select the desired recipe and press the "Load" button. A list of available Luxafor Smart Button devices appears. Then, accordingly, choose the device with which you want to link the selected recipe.

### How to activate the "Provider" integration:

Activate the "Provider" section in the main application navigation panel. A list of all available provider models appears. Then select the desired "Provider" and press the "Add" button. The detailed content of "Provider" appears. Depending on the "Provider" you choose, you will need to take additional steps, for example, in the case of Microsoft Teams, you need to log in to your user account. After the additional steps have been successfully performed, the user must activate the option to be visible/available for the integration model in the "Provider display" section. Depending on the provider, new default integration recipes may appear in the "Recipes" section.

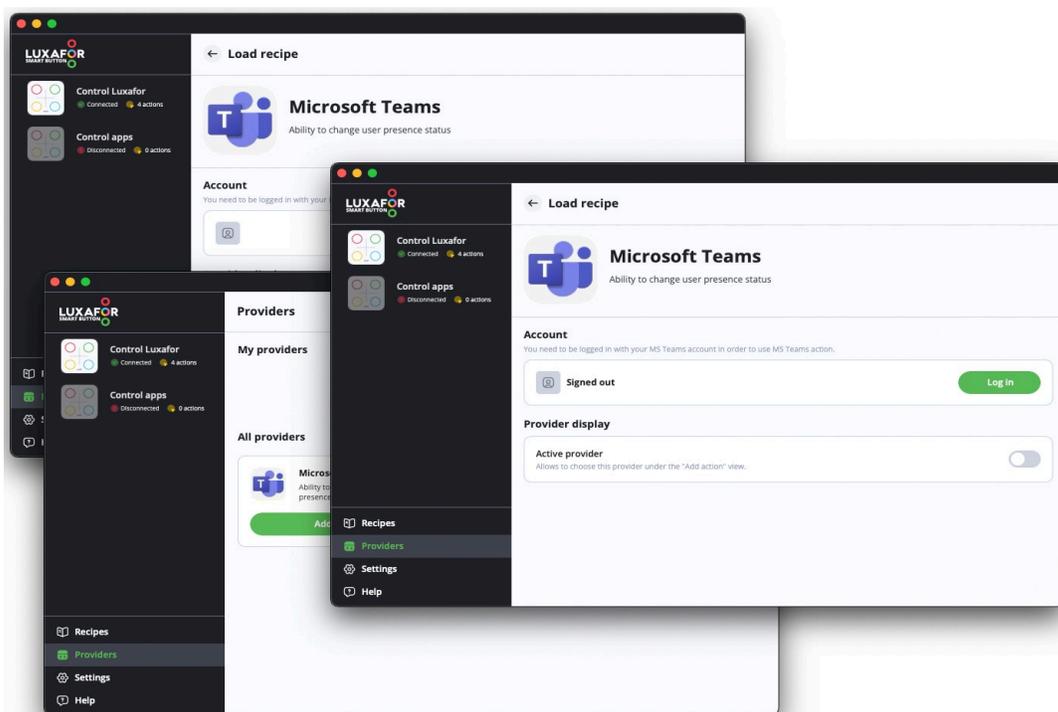

## Additional Remarks

You can use Luxafor Smart Button with any computer that runs the following OS:

- Windows: Starting from Windows 7 up to the latest;
- Apple MacBook: macOS 10.14 up to the latest

Luxafor Smart Button will work with the original USB cable provided as well as with almost any USB cable that supports classic USB data lines.

Luxafor Smart Button is an USB Human Interface Device (HID) with touch sensors as an input source. When the user touches a specific sector of the touch sensor pad on the Luxafor Smart Button - a specific signal is sent to the computer, which is processed by the Luxafor Smart Button Software and is combined with user-defined functionalities.

### **Luxafor Smart Button Software can:**

- Control and change colors for almost all Luxafor devices (Luxafor Flag, Luxafor Orb, Luxafor Bluetooth, Luxafor Colorblind Flag);
- Activate "Outgoing Webhook" events;
- Activate keyboard shortcut events;
- Change the presence status of a user in Microsoft Teams;
- Switch YouTube videos or Spotify playlists, etc.

If you have any questions, please don't hesitate to contact us at [support@luxafor.com](mailto:support@luxafor.com) or call +371 27755544.

Send us a full report of the issue, explaining the details of the situation, when the issue first occurred, and if the issue persists throughout the troubleshooting process. We strongly recommend adding pictures/ videos to better explain the situation.